


Technical Data Sheet

M 1516



M 1516 is a polyurethane-foam (polyether).
 Self-adhesive equipment with a high-quality adhesive system based on acrylate.

Technical Data				
Type (M 1516/...)		15	20	30
Thickness (approximate)	[mm]	15.0	20.0	30.0
Weight (approximate)	[kg/m ²]	0.56 ± 0.05	0.69 ± 0.07	0.99 ± 0.1
Thermal stability 24h	[°C]	100		
Cold resilience	[°C]	- 40 (bonded)		
Peel resistance	[N/mm]	> 0.3		
Heat conductivity	[W/mK]	0.038		
Combustibility FMVSS 302 DIN 75200	[mm/min]	burn rate < 100		

Main function: Airborne sound absorption (absorption)

Applications: Sound insulating cabins, vehicle cabs, mechanical engineering etc.



Processing: The surface must be carefully cleaned from dust, grease, oil and water. Full area adhesion has to be insured. The adhesion strength is directly dependent from the processing pressure. The material has to be pressed in firmly, e.g. using a feed roll.
 Processing temperature: 18 - 25 °C

Storage conditions: Dry at temperatures between 18 - 25 °C
 Max storage time: 6 months

Delivery forms: Rolls, available 1,000 mm wide,
 other sizes and cut-to-size pieces upon request.

Technical Data Sheet

M 1516

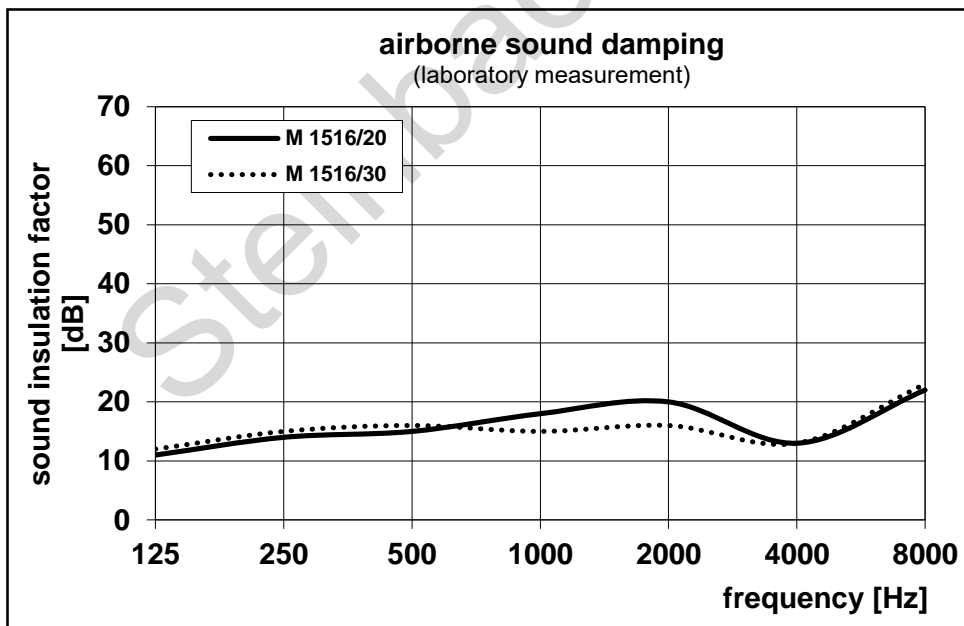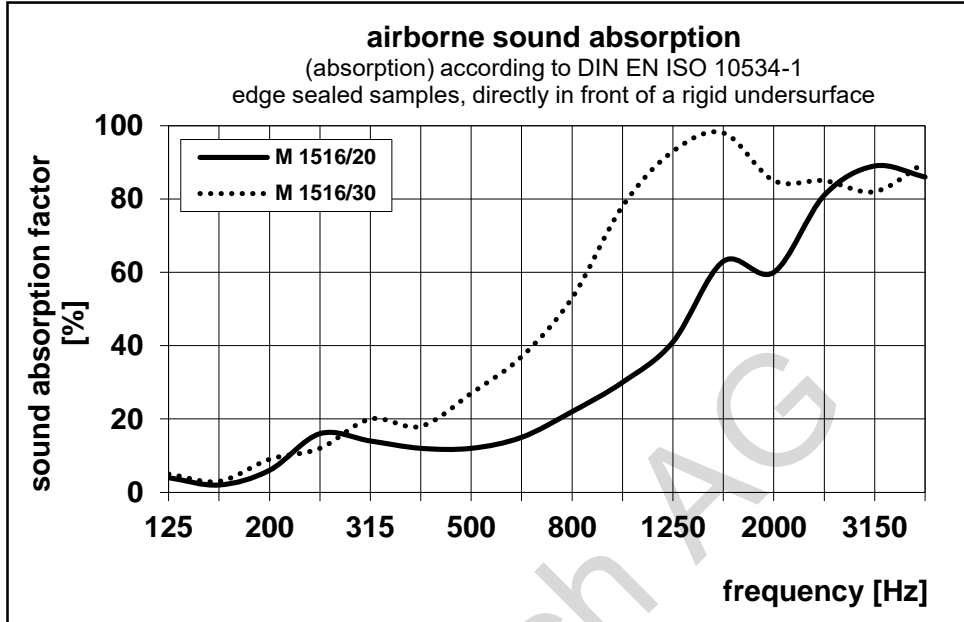

The technical data (average values) as well as material information are based on our present knowledge and experiences. They free the user because of the fullness of possible influences by the application of our products, however, not from own tests and attempts in the approach of the real application. Because of the peculiarities of every individual case we can take over no liability for our indications. On request we are available gladly with information.